

DESCRIPTION

The PM500 series of AC-DC switching power supplies in a package of 4 x 7 x 1.7 inches are capable of delivering 450-500 watts of continuous power at 30 CFM forced air cooling or 350-400 watts at convection cooling. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking. A cover and fan assembly can be added during manufacturing. They are designed for medical applications including those needing BF rated insulation and/or an operation altitude up to 5000 meters.

FEATURES

- BF Class insulation
- Operation altitude up to 5000 meters
- 100-240 VAC input with active PFC
- Less than 300 μ A leakage current
- EN55011 /55022 Class B conducted emissions
- Inhibit - TTL high to disable output
- Compliant with RoHS requirements
- Power consumption in standby mode less than 1W at standby power 5 V /100 mA

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	5.2 A (rms) @115 VAC, 60 Hz 2.6 A (rms) @ 230 VAC, 50 Hz
Earth leakage current:	300 μ A max. @ 264 VAC, 63 Hz
Touch current:	100 μ A max. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum
Remote sense	Compensation for cable losses up to 0.5V
Overvoltage protection:	Set at 115-140% of nominal output voltage
Overcurrent protection:	Protected to output short circuit conditions
Thermal shutdown	Protected to over temperature conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4%, recovering to 1% of final value within 500 us after a 25% step load change
Standby power	5 V at 500 mA maximum
Fan power	12 V at 300 mA maximum

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-10 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C, applicable to convection and forced-air cooling conditions

PM500 SERIES



RoHS

SAFETY STANDARD APPROVALS

GENERAL SPECIFICATIONS

Switching frequency:	85 KHz (typical)
Efficiency:	Typical 90%
Hold-up time:	20 ms minimum at 110 VAC & 500 W
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	30 A @ 115 VAC, or 60 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	4000 VAC from input to output (2 MOPP) 1500 VAC from input to ground (1 MOPP) 1500 VAC from output to ground
MTBF:	100,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F


EMC Performance (IEC60601-1-2:2014)

EN55011/EN55022:	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 15 KV air and ± 8 KV contact
EN61000-4-3:	Radiated immunity, 10 V/m
EN61000-4-4:	Fast transient/burst, ± 2 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 10 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms and 100% reduction for 10 ms

INTERFACE SIGNALS

- PFD:** TTL high for normal operation, low upon loss of input power, turn-on delay time 100-1000 ms, turn-off delay time 1 ms minimum
- Inhibit:** Requires an external TTL high level signal to inhibit outputs for standard models

OUTPUT POWER DERATING CURVE

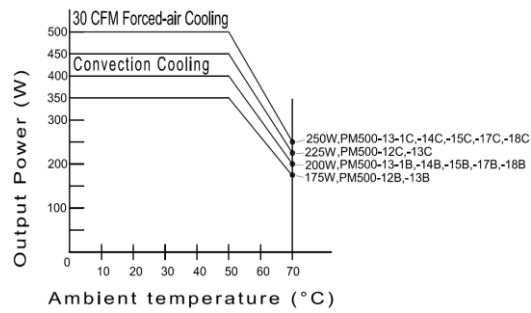

OUTPUT VOLTAGE/CURRENT RATING CHART


Model ⁽¹⁾	Output							Efficiency (typical) 115 /230 Vac
	V1	Min. Current ⁽⁴⁾	Max. Current at convection	Max. Current at 30 CFM	Tol.	Ripple & Noise ⁽³⁾	Max. Output Power ⁽²⁾	
PM500-12B	12 V	0.1 A	29.17 A	37.50 A	±2%	120 mV	350 W /450 W	88 /90%
PM500-13B	15 V	0.1 A	23.34 A	30.00 A	±2%	150 mV	350 W /450 W	88 /90%
PM500-13-1B	18 V	0.1 A	22.23 A	27.78 A	±2%	180 mV	400 W /500 W	88 /90%
PM500-14B	24 V	0.1 A	16.67 A	20.84 A	±2%	240 mV	400 W /500 W	89 /91%
PM500-15B	28 V	0.1 A	14.29 A	17.86 A	±2%	280 mV	400 W /500 W	89 /91%
PM500-17B	36 V	0.1 A	11.12 A	13.89 A	±2%	360 mV	400 W /500 W	89 /91%
PM500-18B	48 V	0.1 A	8.34 A	10.42 A	±2%	480 mV	400 W /500 W	89 /91%
PM500-19B	57 V	0.1 A	7.02 A	8.78 A	±2%	570 mV	400 W /500 W	89 /91%

NOTES:


- Change suffix "B" for U-Bracket form to "C" for enclosed form with cover and fan assembly, e.g. PM500-14C.
- 350-400 W without moving air or 450-500 W with 30 CFM forced air provided by user for "B" version, 450-500 W for "C" version
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.
- All models may be operated at no-load without damage. At no load, output voltage fluctuates beyond 5% due to the burst-mode operation of the control IC in them for energy saving.

MECHANICAL SPECIFICATIONS

U-bracket Form

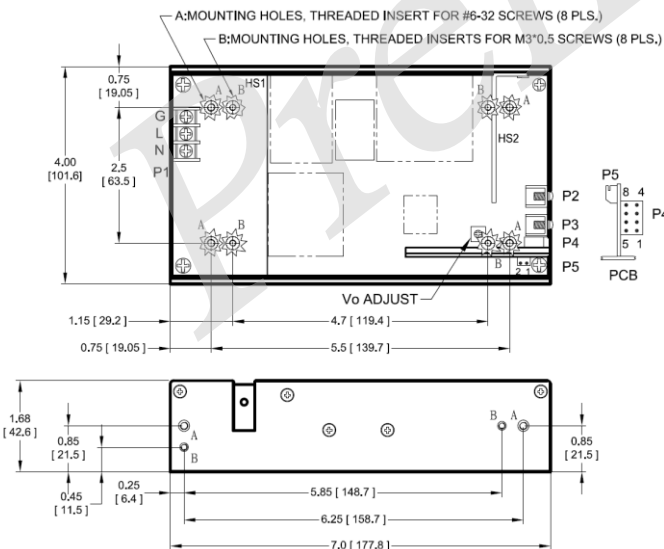

Enclosed Form

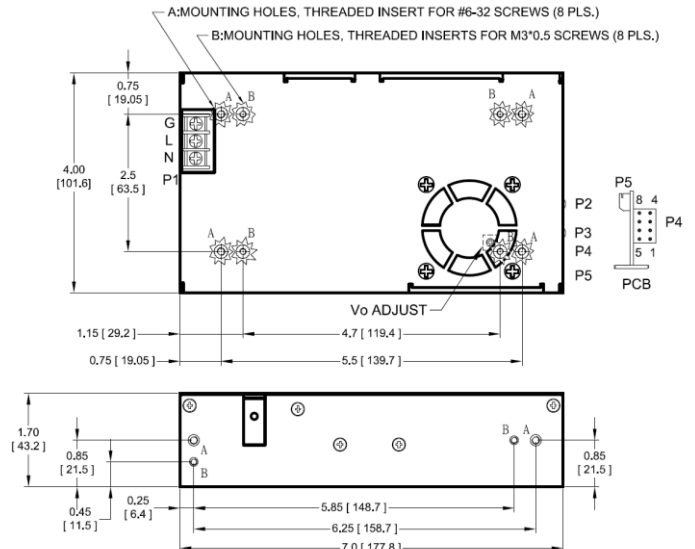

NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector P1 is Dinkle terminal P/N DT-35C-B01W-03, with nickel plated M3 screws.
- Output connectors P2 and P3 are for M4x0.7 screw connections.
- Output connector P4 is Molex header 87833-08 or equivalent, mating with Molex housing 51110-0850 or equivalent.
- Fan connector P5 is JST header S2B-ZR-3.4 or equivalent, mating with JST housing ZHR-2 or equivalent.
- Weight: 1.0 Kg (2.23 lbs.) approx. for U-bracket form, 1.14 Kgs. (2.52 lbs.) approx. for enclosed form
- Maximum penetration of fixing screws is 4 mm from the outer surface of chassis.

PIN CHART

PIN NO.	P1 (AC)			P2	P3	P5	
	1	2	3			1	2
Polarity	Ground	Live	Neutral	+V1	Common Return	Common Return	+12V Fan

PIN NO.	P4							
	1	2	3	4	5	6	7	8
Polarity	Common Return	+V1 Sense	-V1 Sense	PFD	Inhibit	+5V Standby	NC	NC

Preliminary