

## DESCRIPTION

The PUP121L/PUP151 series of AC/DC switching power supplies are for 120-150 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an inlet of the IEC320/C14 to mate with interchangeable cords for world-wide use. All models meet EN55022, EN55024 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

## FEATURES

- No load power consumption less than 0.21 W
- Meet efficiency level VI
- Meet Energy Star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency  $\geq 88\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

## INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	2.0 A (rms) for 115 VAC 1.0 A (rms) for 230 VAC
Touch current:	250 $\mu$ A max. @ 264 VAC, 60 Hz

## OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	350 mV peak to peak maximum
Overvoltage protection:	Set at 125-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions (auto-recovery)
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Relative humidity:	10% to 90% non-condensing

## PUP121L/PUP151 SERIES



CE

RoHS

VI

## SAFETY STANDARD APPROVALS



UL 60950-1, CSA C22.2 No. 60950-1  
File No. E190414



TUV EN 60950-1

## GENERAL SPECIFICATIONS

Hold-up time:	10 ms minimum at 100 VAC
Turn on delay time:	3 s maximum at 100 VAC
Power factor:	0.95 typical
Efficiency:	88% minimum at 110 VAC or 240 VAC.
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	100 A @ 115 Vac or 200 A @ 230 Vac at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to output and ground
MTBF:	500,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332

## EMC Performance

EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, $\pm 8$ KV air and $\pm 4$ KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, $\pm 1$ KV
EN61000-4-5:	Surge, $\pm 1$ KV diff., $\pm 2$ KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and $>95\%$ reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output						Average Active efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise <sup>(1)</sup>	Max. Power	
PUP121L-12	12 V	0 A	10 A	±5%	350 mV	120 W	88.4 /89.4%
PUP151-12	12 V	0 A	12.5 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151-13-2	19 V	0 A	7.89 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151-14	24 V	0 A	6.25 A	±5%	350 mV	150 W	90.0 /91.0%

NOTES:

1. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

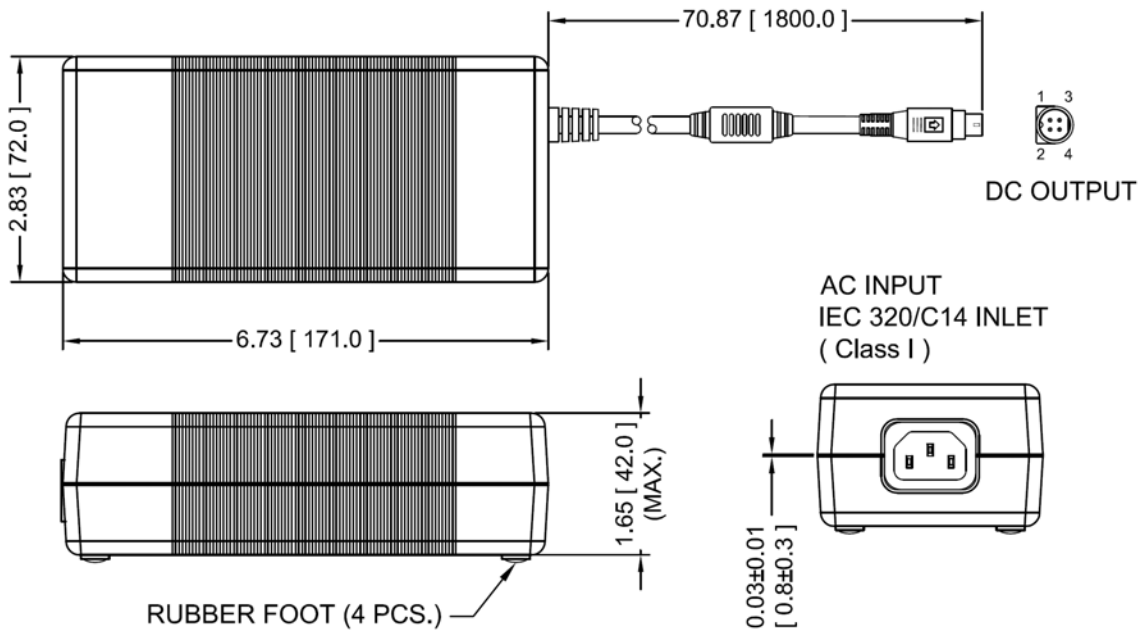

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 800 grams (1.76 lbs.) approx.
4. Refer to Section titled "OPTIONAL OUTPUT CONNECTORS". Change suffix assigned for a selected connector to a wanted model number, e.g. PUP151-14-B1, for ordering.
5. The length of output cable for output voltage 12V is 37.4 [950.0].
6. V1 Return (-) is electrically connected to incoming Earth Ground through a 3kohm resistor as standard

PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return	V1 Return	V1 Return