

DESCRIPTION

The PUP181 series of AC/DC switching power supplies are for 180 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an IEC320/C14 inlet to mate with interchangeable cords for world-wide use. All models meet EN55022, EN55024 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.21w
- Meet efficiency level VI
- Meet energy star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High efficiency
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	2.5 A (rms) for 115 VAC 1.25 A (rms) for 230 VAC
Touch current:	250 µA max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Set at 110-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions
Temperature coefficient:	All outputs ±0.04% /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +40°C
Storage temperature:	-20°C to +80°C
Operating humidity:	20% to 80% non-condensing
Storage humidity:	10% to 90% non-condensing

PUP181 SERIES



CE

RoHS

VI

SAFETY STANDARD APPROVALS



UL 60950-1, CSA C22.2 No. 60950-1
File No. E190414



TÜV EN 60950-1

GENERAL SPECIFICATIONS

Hold-up time:	10 ms minimum at 100 VAC or 240 VAC
Turn on delay time:	3 s maximum at 100 VAC
Power factor:	0.9 minimum @ 230 Vac/50 Hz, Full load
Efficiency:	89% minimum at 100 VAC or 240 VAC
Line regulation:	±0.5% maximum at full load
Inrush current:	70 A @ 115Vac or 140A @ 230Vac at 25°C cold start
Withstand voltage:	1500 VAC from input to output and ground
MTBF:	500,000 hours at full load at 25°C ambient, calculated per SR332

EMC Performance

EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ±8 KV air and ±4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ±1 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms

UNIVERSAL INPUT

PUP181 ITE SERIES


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output						Average Active efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽¹⁾	Max. Power	
PUP181-13-2	19 V	0 A	9.47 A	±5%	350 mV	180 W	90 /91%
PUP181-14	24 V	0 A	7.50 A	±5%	350 mV	180 W	90 /91%
PUP181-18	48 V	0 A	3.75 A	±5%	350 mV	180 W	92 /93%

NOTES:

1. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF electrolytic capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

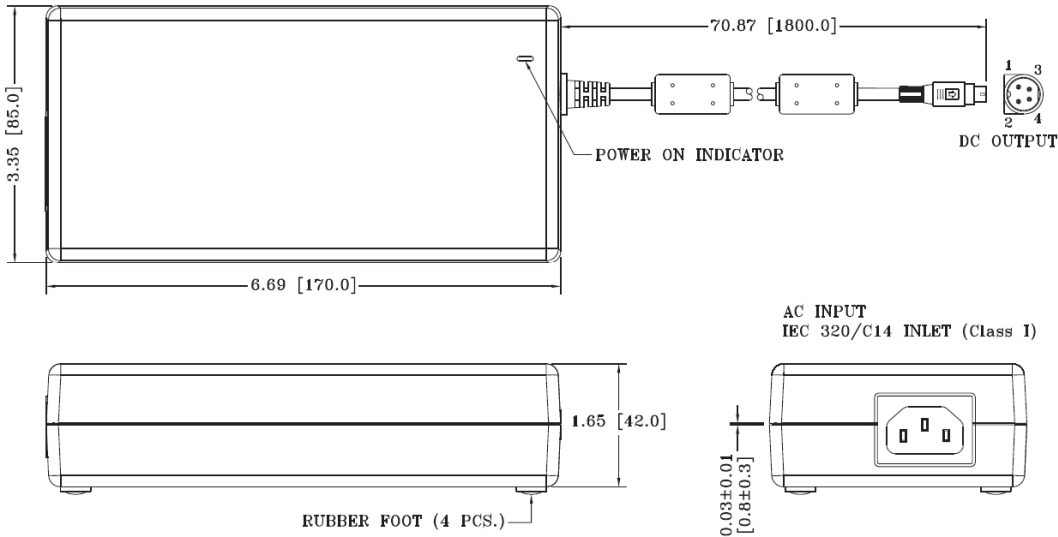

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 860 grams (1.892 lbs.) approx.
4. V1 Return (-) is electrically connected to incoming Earth Ground through a 3kohm resistor as standard

PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return	V1 Return	V1 Return